





Comet 2N+ Dual-Glass Module

600W-625W


Second Generation
Comprehensive Upgrade:

 **Partial Shading Optimisation**


 **Better Temperature Coefficient**

 **High Temperature Restriction**

 **Micro-crack Resistance**

 **Higher Power**

 **Lower BOS**

 **PFAS-free**



Product
Warranty



Performance
Warranty

Extendable to 25yrs*



reddot winner 2023



Munich RE





625W
Output

23.7%
Efficiency

≤1%
First-year Degradation

≤0.35%
Annual Degradation from Year 2-30

30-year Linear Performance Warranty

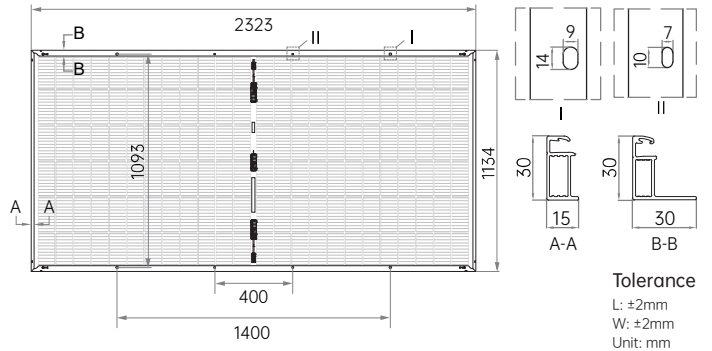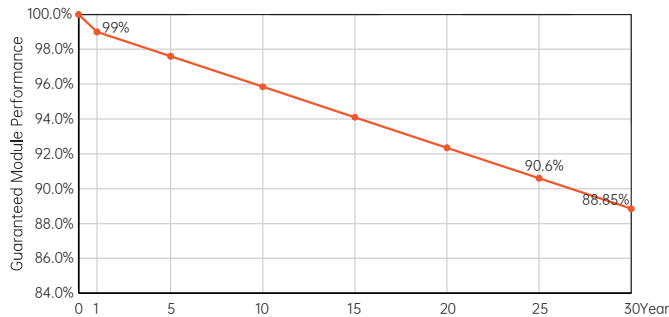

Electrical Characteristics (STC: AM1.5 1000W/m² 25°C NOCT: AM1.5 800W/m² 20°C 1m/s) Power Tolerance: 0~ + 3%

Module Type	AIKO-A600-MAH72Dw		AIKO-A605-MAH72Dw		AIKO-A610-MAH72Dw		AIKO-A615-MAH72Dw		AIKO-A620-MAH72Dw		AIKO-A625-MAH72Dw	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
P _{max} [W]	600	452	605	456	610	459	615	463	620	467	625	471
V _{oc} [V]	54.14	51.13	54.24	51.22	54.34	51.32	54.44	51.41	54.57	51.53	54.70	51.66
V _{mp} [V]	44.80	42.31	44.90	42.40	45.00	42.50	45.10	42.59	45.20	42.69	45.30	42.78
I _{sc} [A]	14.14	11.44	14.22	11.50	14.30	11.57	14.38	11.63	14.46	11.70	14.54	11.76
I _{mp} [A]	13.40	10.69	13.48	10.76	13.56	10.82	13.64	10.89	13.72	10.95	13.80	11.01
Module Efficiency	22.8%		23.0%		23.2%		23.3%		23.5%		23.7%	

Mechanical Specification

Cell Type	N-Type ABC
Glass	Dual glass, 2.0 + 2.0mm coated semi tempered glass
Frame	Anodized aluminum
Cable	4mm ² (IEC) 12AWG(UL) 350mm or Customized Length
No. of Cells	144(6*24)
Junction Box	IP68,3 bypass diodes
Connector	MC4 Compatible
Weight	31kg±3%
Dimension	2323*1134*30mm
Package Detail	36pcs per pallet / 180pcs per 20'GP / 720pcs per 40'HC

Temperature Ratings (STC)

Temperature Coefficient of I _{sc}	+ 0.05%/ °C
Temperature Coefficient of V _{oc}	- 0.22%/ °C
Temperature Coefficient of P _{max}	- 0.26%/ °C

Installation Guide

Operation Temperature	-40°C - +85°C
Maximum Series Fuse Rating	25A
Protection Class	Class II
V _{oc} and I _{sc} Tolerance	±3%
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	25 mm diameter hail at 23 m/s
Fire Rating	IEC Class C



www.aikosolar.com
marketing@aikosolar.com

*AIKO Energy reserves right to update the specification without notice
AEWHD_EN_V6.3